


# 共模电感 Common mode choke

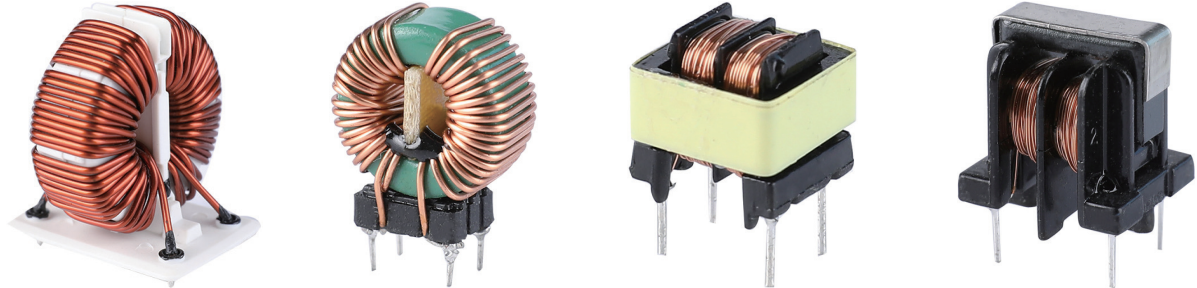

## ■ 特点 Features

- 工作频率: 1kHz~200MHz
- 工作温度: -20℃~+110℃
- 按客户需求设计定制
- 符合UL和VDE安规要求
- Operation Frequency from 1kHz to 200MHz
- Operating Temperature: -20℃~+110℃
- Can be designed to customer requirements
- Can meet UL and VDE safety requirements

## ■ 主要用途 Typical Applications

- 适用于机顶盒, 液晶显示器面板
- Designed for set-top box, LCD panel

## ■ 典型规格 Typical Specifications

- 绝缘等级: B/F/H
- 推荐储存温度: -20℃~+55℃
- Insulation Grade: class B/F/H
- Recommended Storage Temperature: -20℃~+55℃

项目 Item	型号 Type	输出功率 Output Power (W)	励磁电流 Diemenstion (mm)	重量 Weight (g)	备注 Remark
1	UU9.8	7W-10W	12.5×10.5×10	9.5	
2	UU10.5	10W-13W	14.5×12.5×11.5	10.8	
3	UU15.7	13W-18W	18.5×14.5×13.5	16.5	
4	EE8.3	5W-9W	9.2×9.2×9.2	7.8	
5	EE12	10W-13W	13.5×13.5×10.5	9.5	
6	T9*5*3 (锰锌)	8-10W	12.5×12.5×8.5	8.2	
7	T33.5*19.5*6.0 (铁粉芯)	28W-40W	38.5×19.5×12.5	26.5	
8	T32*20*10 (纳米晶)	35W-55W	36.5×20.5×13.5	27.5	