


EI Type 低频变压器 Low frequency transformer

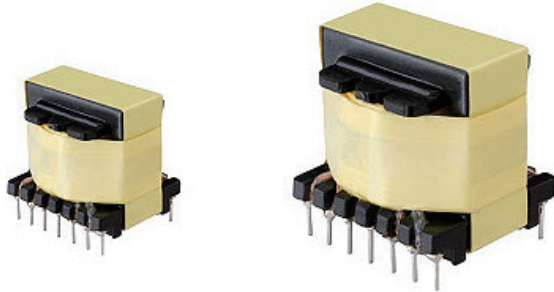

■ 特点 Features

- 工作频率: 50Hz~1kHz
- 工作温度: -20°C~+110°C
- 按客户需求设计定制
- 符合UL和VDE安规要求
- Operation Frequency from 50Hz to 1kHz
- Operating Temperature: -20°C~+110°C
- Can be designed to customer requirements
- Can meet UL and VDE safety requirements

■ 主要用途 Typical Applications

- 适用于线性电源, 放大器, 电力电源变压器
- 适用于小家电, 榨汁机, 音响设备, 空调, 风扇, 冰箱等
- Designed for linear power supply, Amplifier, power supply transformer
- Designed for Small household appliances. Juice extractor, Sound system, air conditioner, Air fan, Refrigerator etc.

■ 典型规格 Typical Specifications

- 绝缘等级: B/F
- 推荐储存温度: -20°C~+55°C
- Insulation Grade: class B/F
- Recommended Storage Temperature: -20°C~+55°C

项目 Item	型号 Type	输出功率 Output Power (W)	励磁电流 Excitation Current (mA)	磁通密度 Magnetic Flux Density	工作频率 Work Frequency (Hz)
1	EI35	0.5W-2.5W	15-22	1.15	50-1000
2	EI41	0.6W-7.5W	22-30	1.05	50-1000
3	EI48	2.0W-16W	30-35	0.95	50-1000
4	EI54	5.0W-34W	35-40	0.9	50-1000
5	EI57	7.0W-42W	40-45	0.88	50-1000
6	EI66	17W-77W	45-55	0.85	50-1000
7	EI76	35W-122W	55-65	0.8	50-1000
8	EI86	70W-200W	65-80	0.75	50-1000